

緊急後備照明燈 (發光二極管)  
Automatic Emergency Light (LED)


Range Emergency Exit Sign Box™



- easy to install
- more reliable for using Ni-CAD battery
- high efficiency super flux LED for higher performance
- "Red & Green LED" to indicate mains supply and charger are functional
- "Test Button" to allow easy checking of luminaire operation

Standards 標準認證

- BS 4533
- BS 5266-1:2005
- BS EN 61347-2-7:2006
- BS EN 60598-2-22:1999
- FSD PPA 104A (4th Revision)

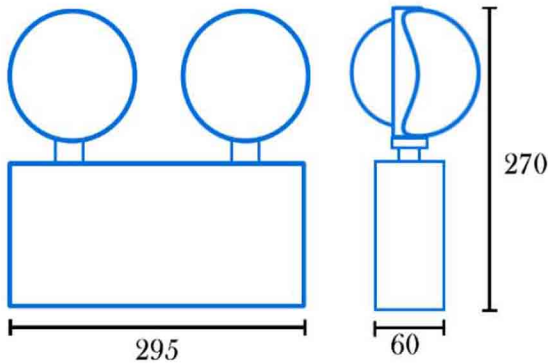

Emergency exit sign

MODEL 型號	AUTO-21
Mode of Operation 操作模式	Non-maintained Type 後備式
Emergency Output 緊急輸出	2 x 1W
Emergency Duration 放電時間	2 Hours 小時
Mains Voltage 電源電額	A/C 220V 50Hz (other available) +/- 10%
Battery 電池	3.6V Ni-CAD
Recharge Period 充電時間	12 for 2 Hours 小時
Bulb 電燈泡	2 x 1W
Metal Box Size 鐵箱體積	295 x 150 x 60 mm 毫米 (LxWxH 長x闊x高)