



Respiratory Protection
EEBD'S

Sèkur Navy Cap





Respiratory Protection
 EEBD'S

Sèkur Navy Cap

Sèkur Navy Cap is a hood type, constant flow, breathing apparatus to escape from areas in which toxic substances or oxygen deficiency may occur. Easy donning for quick escape, certified for 10 or 15 minutes duration.



DESCRIPTION

Sèkur Navy Cap is a hood type, constant flow, breathing apparatus to escape from areas in which toxic substances or oxygen deficiency may occur.

- Models available: 10 minutes duration and 15 minutes duration.
- 10 minute apparatus utilizes a 2.0 lt., 200 bar steel cylinder, while 15 minute apparatus uses a 3.0 lt., 200 bar steel cylinder, or a 2 l., 300 bar composite cylinder.


MAIN FEATURES

One size coated fabric hood, foldable,
 with rubber collar and transparent and anti-fog visor

Silicon inner half mask to limit
 re-breath

Automatic activation
 on zip opening
Tear-off seal to prevent
 tampering

Coated fabric antistatic bag
 with strap

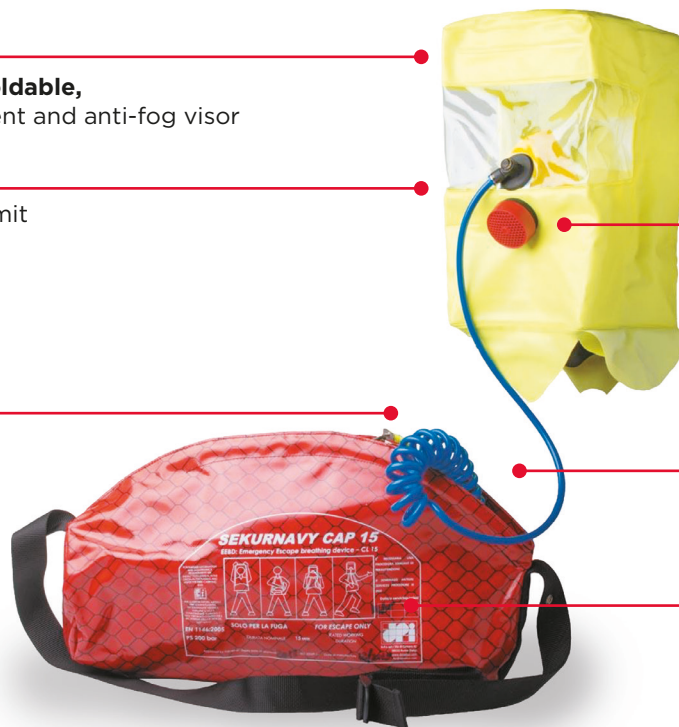



High reliability
 exhalation valve

Flexible handle
 for easy donning

Flexible and extendable
 inlet hose

Instruction pictogram
 for **easy donning**

MAIN FEATURES

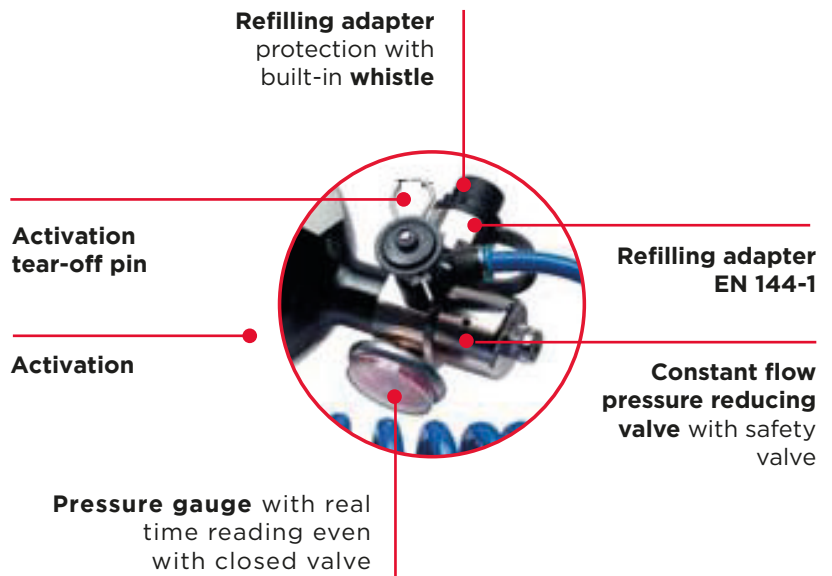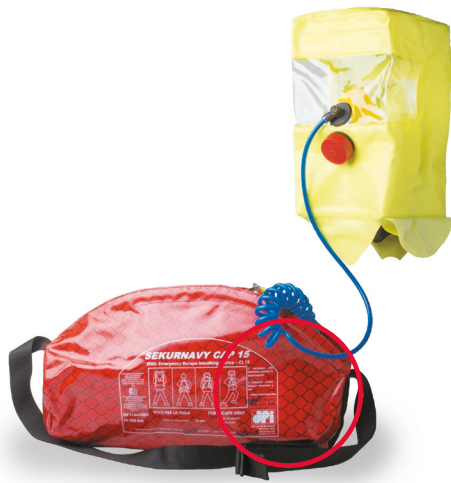

ADVANTAGES

- Internal silicone half mask to limit CO₂.
- High reliability exhalation valve
- Automatic activation on zip opening
- Tear-off seal to prevent tampering
- Flexible handle for easy donning
- Instruction pictograms
- Red antistatic bag with shoulder strap
- Comfort and visibility

PERFORMANCES

• SNC with steel cylinder



Lightness



Adaptability



Easy donning



Sturdiness



Shelf life

• SNC with composite cylinder



Lightness



Adaptability



Easy donning



Sturdiness



Shelf life

APPLICATION FIELDS



Marine



Petrochemical



Industrial



Chemical-Pharmaceutical Industry

MATERIALS

- Hood: Coated fabric
- Visor: Transparent plastic
- Collar: Silicone
- Inner half mask: Silicone
- Carrying bag: Coated fabric
- Valve/Reducer: Nickel-plated brass alloy
- Cylinder: Steel/Composite

WEIGHT

- SNC 15 min ready to use (with 3 L. steel cylinder): 6 kg
- SNC 15 min ready to use (with 2 L. composite cylinder): 4,1 kg

CYLINDERS

- 10 minute apparatus utilizes a 2.0 lt., 200 bar steel cylinder
- 15 minute apparatus uses a 3.0 lt., 200 bar steel cylinder, or a 2 l., 300 bar composite cylinder

Cylinders are manufactured to EC specification (PED)

STORAGE

Temperature: -15 °C +60 °C

DONNING AND USING

Place neck strap of the carrying bag over head and adjust strap until equipment sits in centre of chest.

IN AN EMERGENCY:

- Grip the yellow loop on the lid of the zip of the carrying bag and pull firmly in the direction to open the zip to break the anti tampering seal. This action will also activate the air flow to the hood
- Immediately remove hood from the carrying bag. Safety Warning: Duration of equipment begins from the time of air supply valve activation and not from the time of wearing hood
- Grip both flaps sides of the base of the hood and lift the hood above the head, pull the hood over the head locating the half mask over the nose and mouth. Breathe normally and immediately leave the hazardous area by short and safest escape route

CERTIFICATIONS

SNC complies with EN 1146 and ISO 23269-1.
Certified according to European Regulation 2016/425.
Compliant to MED Directive.

ITEM NO.

• Sèkur Navy Cap 10	10 min.	4342 8225
• Sèkur Navy Cap 15	15 min.	4342 8230
• Sèkur Navy Cap 15C	15 min.	4342 8236