

Emergency LED Exit Sign Plate


- LED lumen less than 5% depreciation for the first year
- Less maintenance required and with 3 year guarantee for LED bar
- High efficiency super bright LED for higher performance
- Discharge time more than 120-180 min. in the emergency mode
- Lumen more than 120cd/m² for the first two hours of operation
- Power factor >85% & 3W power consumption

Standards

BS EN61347-2-13
BS EN60598-2-22
ICEL: 1001 : Part II

Hong Kong Fire Services Department :
PPA-104 & PPA-104A 4th revision
BS5266
BS5499

Legend

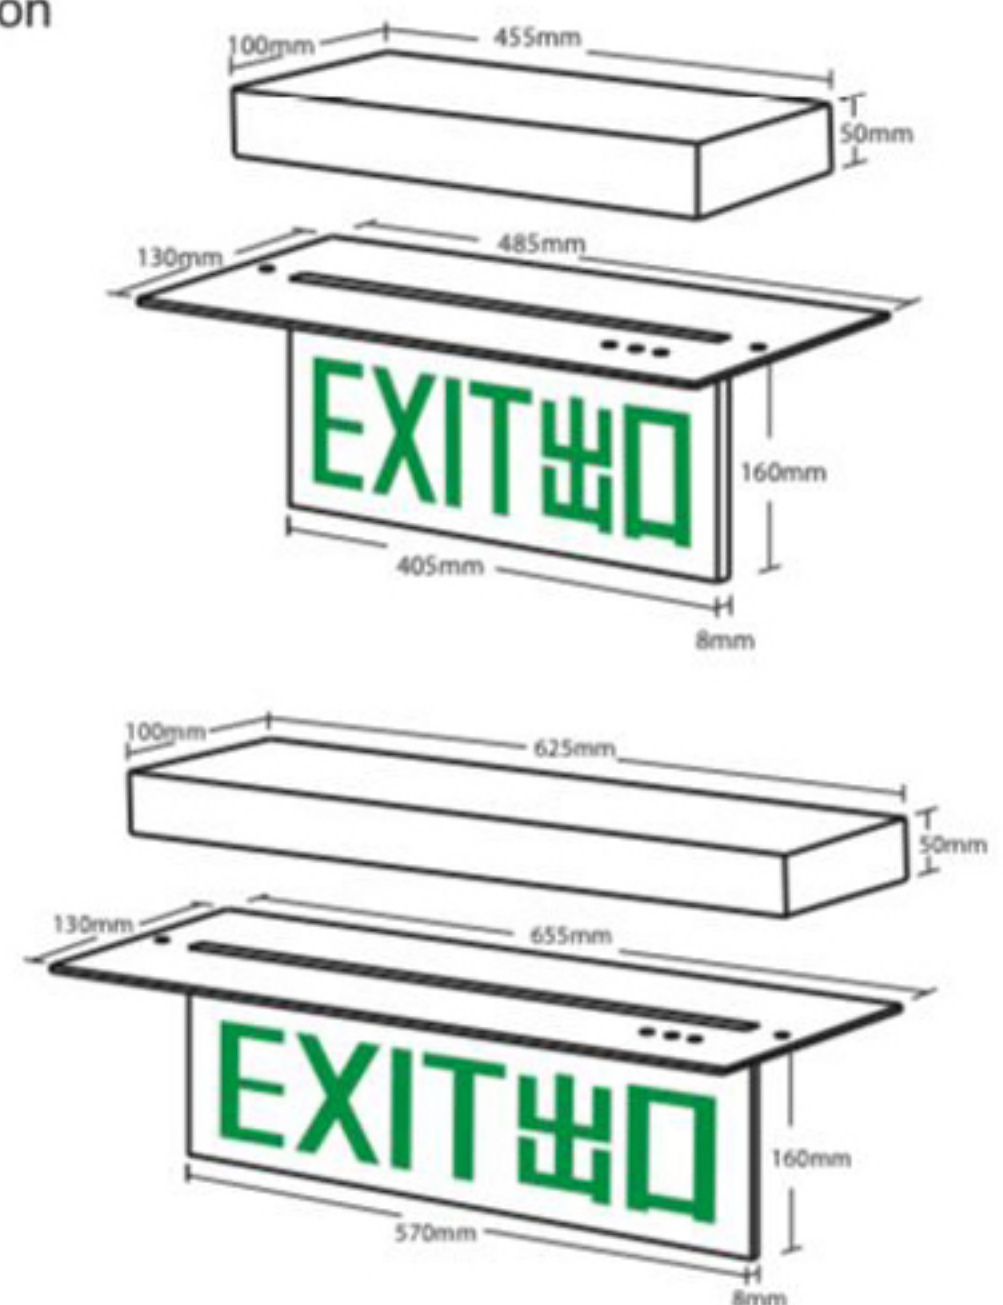

Model	ALED-PR405	ALED-PR570
Lamp	High Brightness White LED Bar	
Mode of Operation	Maintained Type	
Emergency Duration	2 Hours / 3 Hours	
Recharge Period	12 Hours	
Transfer Time	<0.3 Second	
Emergency Luminance	In average 120cd/m ² in DC Mode	
Main Supply Voltage	AC 220V-230V +/-10% 50Hz	
Battery	Sealed Ni-Cd/Ni-Mh rechargeable Battery 4.8V 1.0/1.3Ah	
Power Consumption	~3W	
Operating Temperature	0°C-50°C	
Plate Size (PLxPHxPD)mm	405 x 160 x 8mm	570 x 160 x 8mm